

INSTALLATION GUIDE



6254 BUCKET SEAT SET

Ram ProMaster (2015-2018)

BILL OF MATERIALS

Item No.	Description	Qty.
62-542	Seat Back Cover Passenger Side	1
62-541	Seat Bottom Cover Passenger Side	1
62-544	Headrest Cover Passenger Side	1
62-542	Seat Back Cover Driver Side	1
62-540	Seat Bottom Cover Driver Side	1
62-544	Headrest Cover Driver Side	1

QUICK START GUIDE

Phase 1 - Preparation

- 1.1 Adjust Seat.
- 1.2 Remove Headrests.

Phase 2 - Installation

- 2.1 Install Seat Back Cover.
- 2.2 Install Seat Bottom Cover.
- 2.3 Install Headrest Cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

PHASE 1 – PREPARATION

1.1 REMOVING



- 1.1 Adjust Seat.
 - Slide seat forward and tip seat back ahead.

- 1.2 Remove Headrests.
 - Pull headrests out of the seats by pressing the tabs at the base of the headrests and pulling the headrest up.



PHASE 2 – INSTALLATION

2.1 SEAT COVER INSTALLATION



- 2.1 Install Seat Back Cover.
 - Ensure the tag inside the cover corresponds with the seat you are working on.
Each cover will have a Driver or Passenger tag.
 - Turn seat cover 3/4 of the way inside out.
 - Pull seat back cover into position, making sure that the holes in the cover align with the holes in the seat back.
 - Stretch the cover over the headrest holes.
 - Continue pulling the cover down the seat back, turning it right side out as you go.
 - Push flap from front of cover between seat back and seat bottom, out the back of the seat .
 - Double the end of the flap over to prevent the “hook” Velcro from sticking to the factory upholstery.
 - Pull the flap tight and attach to the Velcro on the back of the seat.
 - Fasten Velcro flap under armrest.

❑ 2.2 Install Seat Bottom Cover.

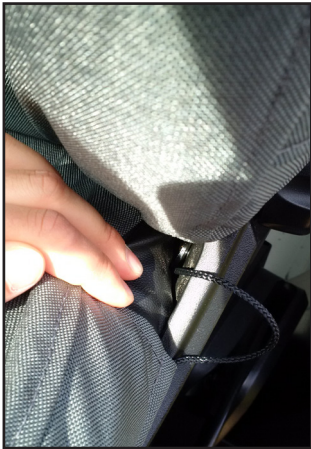

- ❑ Ensure the tag inside the cover corresponds with the seat you are working on.
Each cover will have a Driver or Passenger tag.
- ❑ Place seat bottom cover over bottom of seat.

- ❑ Push flap on top of cover between seat back and seat bottom.
- ❑ Push strings between seat bottom and plastic trim. They will go through where the seat back and bottom meet.
- ❑ Pull strings behind seat and pull tight.
- ❑ Tie a loop in one string, close to the edge of the seat.
- ❑ Run the other string through the loop and pull as tight as possible. This is what keeps your seat bottom from shifting.



Seat cover bottom flap, running OVER all bars, wires, etc.

- ❑ Pull bottom flaps from front of seat bottom and attach to top flap.
- ❑ Flaps MUST run OVER seat positioning bar in front of seat.



- ❑ 2.3 Install Headrest Covers.
- ❑ Put headrests back on seats.
- ❑ Press tabs at base of headrest and push headrest into seat back.
- ❑ Pull headrest cover over headrest with “hook” Velcro on the back and “loop” Velcro on the front.
- ❑ Pull front flap over back flap and fasten.





“Congratulations, you have successfully installed your
Seat Cover Set!

Thank you for doing business with us.”

