

INSTALLATION GUIDE



6255 BUCKET SEAT SET

Ford Transit (2015-2018)

BILL OF MATERIALS

Item No.	Description	Qty.
62-553	Seat Back Cover Passenger Side	1
62-551	Seat Bottom Cover Passenger Side	1
62-554	Headrest Cover Passenger Side	1
62-552	Seat Back Cover Driver Side	1
62-553	Seat Bottom Cover Driver Side	1
62-554	Headrest Cover Driver Side	1

QUICK START GUIDE

Phase 1 - Preparation

- ❑ 1.1 Remove Headrests.

Phase 2 - Installation

- ❑ 2.1 Install Seat Back Cover.
- ❑ 2.2 Install Seat Bottom Cover.
- ❑ 2.3 Install Headrest Cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

PHASE 1 – PREPARATION

1.1 REMOVING



- ☐ 1.1 Remove Headrests.
 - ☐ Pull headrests out of the seats by pressing the tabs at the base of the headrests.

PHASE 2 – INSTALLATION

2.1 SEAT COVER INSTALLATION




- ☐ 2.1 Install Seat Back Cover.
 - ☐ Ensure the tag inside the cover corresponds with the seat you are working on. Each cover will have a Driver or Passenger tag.
 - ☐ Undo elastic strap holding seat back flap from under seat bottom (Black strap with white clip).
 - ☐ Tip seat back flap up and tuck inside seat cover as you pull it down.
 - ☐ Turn seat cover 3/4 of the way inside out.
 - ☐ Pull seat back cover into position, making sure that the holes in the cover align with the holes in the seat back.
 - ☐ Stretch the cover over the headrest holes.
 - ☐ Continue pulling the cover down the seat back, turning it right side out as you go.
 - ☐ Push flap from front of cover between seat back and seat bottom, out the back of the seat .
 - ☐ Double the end of the flap over to prevent the “hook” Velcro from sticking to the factory upholstery.
 - ☐ Pull the flap tight and attach to the Velcro on the back of the seat.
 - ☐ Fasten flap under the armrest.

❑ 2.2 Install Seat Bottom Cover.



- ❑ Ensure the tag inside the cover corresponds with the seat you are working on.
Each cover will have a Driver or Passenger tag.
- ❑ Place seat bottom cover over bottom of seat.

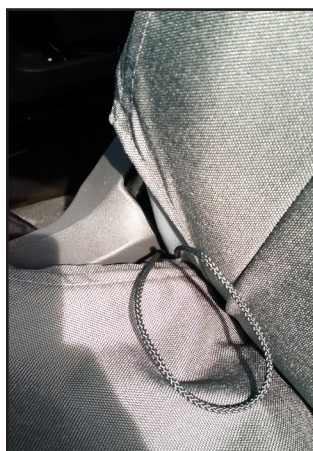

- ❑ Push flap on top of cover between seat back and seat bottom.
- ❑ Tuck sides of cover behind plastic trim.
- ❑ Push strings between seat bottom and plastic trim.
They will go through where the seat back and bottom meet. Strings must go UNDER round bar that runs through seat bottom.
- ❑ Pull strings behind seat and pull tight.
- ❑ Tie a loop in one string, close to the edge of the seat.
- ❑ Run the other string through the loop and pull as tight as possible. This is what keeps your seat bottom from shifting.

UNDER



Seat cover bottom flap, running OVER all bars, wires, etc.

- ❑ Pull bottom flaps from front of seat bottom and attach to top flap.
- ❑ Flaps MUST run OVER bars and brackets under seat.

- ❑ 2.3 Install Headrest Covers.
- ❑ Put headrests back on seats.
- ❑ Press tabs at base of headrest and push headrest into seat back.
- ❑ Pull headrest cover over headrest with “hook” Velcro on the back and “loop” Velcro on the front.
- ❑ Pull front flap over back flap and fasten.





"Congratulations, you have successfully installed your
Seat Cover Set!

Thank you for doing business with us."

