

INSTALLATION GUIDE



6257-19 BUCKET SEAT SET

Mercedes Benz Sprinter (2018-2019)

BILL OF MATERIALS

Item No.	Description	Qty.
62-573	Seat Back Cover Passenger Side	1
62-571	Seat Bottom Cover Passenger Side	1
62-574	Headrest Cover Passenger Side	1
62-572	Seat Back Cover Driver Side	1
62-573	Seat Bottom Cover Driver Side	1
62-574	Headrest Cover Driver Side	1

QUICK START GUIDE

Phase 1 - Preparation

- ☐ 1.1 Remove Headrests.
- ☐ 1.2 Raise seat up, slide forward and lean back forward.

Phase 2 - Installation


- ☐ 2.1 Install Seat Back Cover.
- ☐ 2.2 Install Seat Bottom Cover.
- ☐ 2.3 Install Headrest Cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

PHASE 1 – PREPARATION


1.1 REMOVING

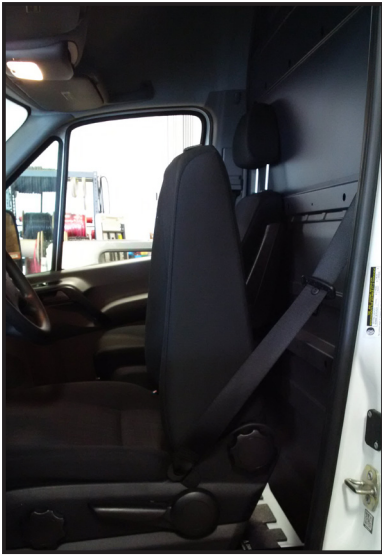

- ☐ 1.1 Remove Headrests.
 - ☐ Pull headrests out of the seats by pressing the tabs at the base of the headrests.
 - ☐ Slide seat forward, raise up, and lean seat back forward.

PHASE 2 – INSTALLATION

2.1 SEAT COVER INSTALLATION


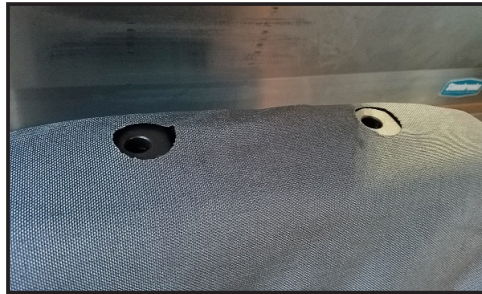


- ☐ 2.1 Install Seat Back Cover.
 - ☐ Ensure the tag inside the cover corresponds with the seat you are working on. Each cover will have a Driver or Passenger tag.
 - ☐ Turn seat cover 3/4 of the way inside out.
 - ☐ Pull seat back cover into position, making sure that the holes in the cover align with the holes in the seat back.
 - ☐ Stretch the cover over the headrest holes.
 - ☐ Continue pulling the cover down the seat back, turning it right side out as you go.
 - ☐ Push flap from front of cover between seat back and seat bottom, out the back of the seat .
 - ☐ Double the end of the flap over to prevent the “hook” Velcro from sticking to the factory upholstery.
 - ☐ Pull the flap tight and attach to the Velcro on the back of the seat.
 - ☐ Fasten flap under the armrest.

❑ 2.2 Install Seat Bottom Cover.



- ❑ Put cover over seat bottom.
- ❑ Tuck strings between seat bottom and trim, where the back and bottom meet.
- ❑ Tuck sides of cover behind plastic trim.
- ❑ Pull strings tight.
- ❑ Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- ❑ Push top flap between seat back and seat bottom.
- ❑ Run front flap over seat adjustment lever, wires, and brackets.
- ❑ Pull front flap tight and fasten to Velcro on top flap.

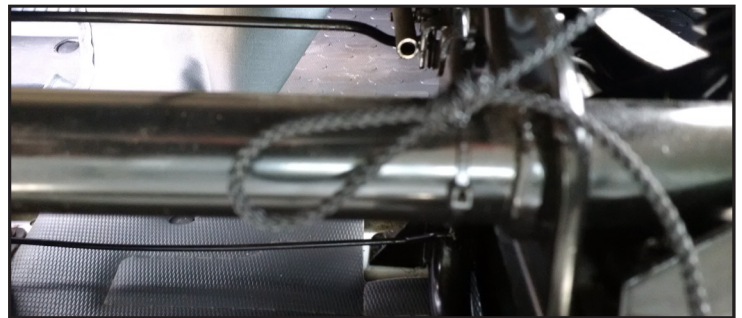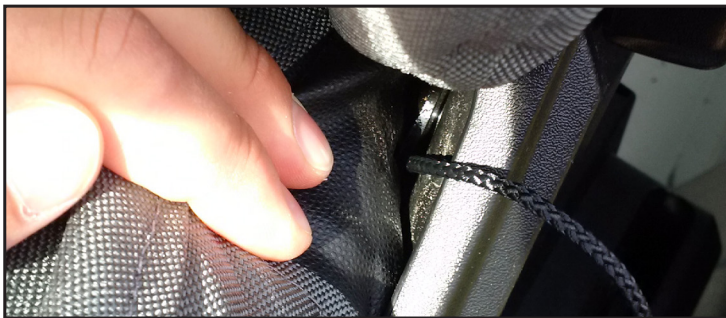

- ❑ 2.3 Install Headrest Covers.
- ❑ Put headrests back on seats.
- ❑ Press tabs at base of headrest and push headrest into seat back.
- ❑ Pull headrest cover over headrest with “hook” Velcro on the back and “loop” Velcro on the front.
- ❑ Pull front flap over back flap and fasten.





"Congratulations, you have successfully installed your
Seat Cover Set!

Thank you for doing business with us."

